



**Advanced Card Systems Ltd.**  
Card & Reader Technologies

# ACR122U NFC Reader

Technical Specifications





## Table of Contents

1.0.	Introduction .....	3
2.0.	Features .....	4
3.0.	Typical Applications.....	5
4.0.	Technical Specifications.....	6



## 1.0. Introduction



ACR122U is a PC-linked contactless smart card reader/writer developed on the 13.56 MHz contactless technology. It is the world's first CCID-compliant contactless card reader/writer that follows both ISO 14443 and ISO 18092. This device is designed to support not only Mifare and ISO 14443 Type A and B cards but also FeliCa and NFC tags.

By making use of up to 424 kbps for NFC tag access and full USB speed of up to 12 Mbps, ACR122U can read and write faster and more efficiently. Furthermore, ACR122U is also PC/SC compliant which allows inter-operability across different applications and platforms. You can experience the convenience in using ACR122U, with its compact size and the various features it offers, for applications such as payment, access control, time and attendance, and mass transit.



## 2.0. Features

- CCID-compliant
- PC/SC-compliant
- Read/write speed up to 424 kbps
- Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
- Supports ISO 14443 Type A and B, Mifare, FeliCa, and all 4 types of NFC (ISO/IEC 18092) tags
- Built-in anti-collision feature (only 1 tag is accessed at any time)
- USB PnP
- User-controllable bi-color LED
- User-controllable buzzer
- Compact size: 98 mm (L) x 65 mm (W) x 12.8 mm (H)
- Light Weight: 70 g




### 3.0. Typical Applications

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Transportation
- Network Security
- Access Control
- Loyalty Program





## 4.0. Technical Specifications

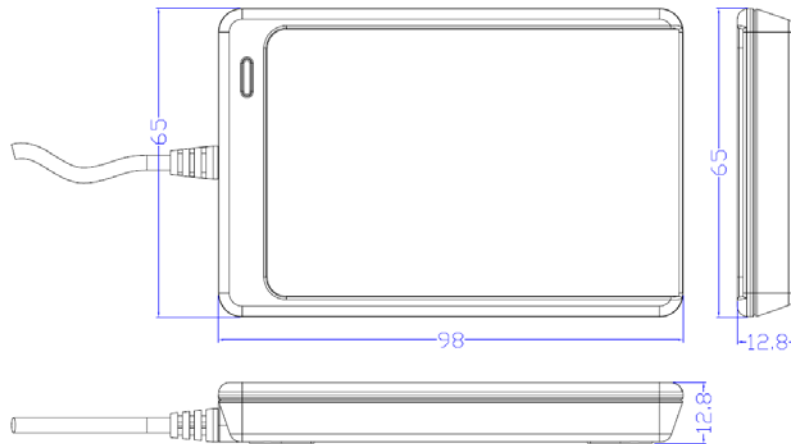

### Universal Serial Bus Interface

Power source ..... From USB  
 Speed..... 12 Mbps (Full Speed)  
 Supply Voltage..... Regulated 5 V DC  
 Supply Current ..... 200 mA (maximum); 50 mA (standby); 100 mA (normal)

### Contactless Smart Card Interface

Standard ..... ISO/IEC 18092 NFC, ISO 14443 A and B, FeliCa, Mifare  
 Protocol..... FeliCa protocol, T=CL protocol  
 Operating Frequency ..... 13.56 MHz  
 Smart card read / write speed ..... 106 kbps, 212 kbps, 424 kbps

### Casing

Dimensions ..... 98 mm (L) x 65 mm (W) x 12.8 mm (H)  
 Weight..... 70 grams  
 Material ..... Polycarbonate (PC)  
 Color ..... Pearl White  
 Antenna Size..... 50 mm x 40 mm  
 Operating distance ..... Up to 50 mm (depending on tag type)

### Built-In Peripherals

Bi-Color LED ..... Bi-color LED, red and green  
 Buzzer ..... Monotone

### Operating Conditions

Temperature..... 0 – 50 °C  
 Humidity ..... 10% - 80%

### Cable Connector

Length..... 1.0 M (USB)

### Certifications/Compliance

PC/SC, CCID, CE, FCC, VCCI, RoHS Compliant, USB Full Speed  
 Microsoft @ WHQL 2000, Server 2003, XP, Vista, Server 2008, Server 2008 R2, 7

### Device Driver Operating System Support

Windows @ 98, ME, 2000, Server 2003, XP, Vista, Server 2008, Server 2008 R2, 7  
 Windows @ CE 5.0 and 6.0  
 Linux, Mac

